

Tongya road NO.1, Quanpu industrial area Liangshan County, Shandong Province, China Mobile: +86 15805376335 | Tel: +86-537-7608666 | jonah@shengrunauto.cn

QUOTATION SHEET



Quotation NO .: SR220310JL04

Date: 2022.03.10

ltem No.	Description of Vehicles	Quantity	Price Term	Unit Price	Total Amount
1.	40,000 Liters Bulk Cement Tank Semi Trailer	10 Units	FOB Qingdao	US\$	US\$
			CIF Lome	US\$	US\$

Currency: 1 USD = 6.3 RMB Quotation valid date: 15 days

Anti-vibratio

Anti-leakage

Anti-rollove

Terms & Conditions:

Delivery time	Delivery timeProduction time 15 days after deposit payment received. 17 days ready to ship at China port.	
Package & Shipment	1 Unit per package by Tractor truck, Shipment by Bulk Ship or Ro-ro Ship	
Warranty &	Warranty & 12 Months warranty for main beam.	
After-sale service We'll provide qualified spare parts with the price we get from our s		
	and sent engineer for maintenance if necessary.	
Payment terms	30% Deposit by T/T within 3 days after order confirmed. 70% Balance payment by T/T before delivery from factory.	

SHENGRUN AUTO Since 1982. Double safety Tanker

--- Page 1 / 8 ---

Anti-damage

Anti-fracture



Tongya road NO.1, Quanpu industrial area Liangshan County, Shandong Province, China Mobile: +86 15805376335 | Tel: +86-537-7608666 | jonah@shengrunauto.cn

Specifications:

	Туре	V-shape Bulk Cement Tank Semi Trailer, single compartment			
Usage		Hauling Bulk cement, fly ash, Dry mix mortar			
	Tare Weight	Approx. 9 Tons			
Weight	Loading capacity	Effective volume 40,000 Liters, +5% vapor space			
Dimensions	Outside Dimension	10800*2500*3980 mm (Final dimension depend on the producing design drawings)			
	Design/welding Technology	Heavy duty and extra durability designed; "T" main beam welding by automatic Submerged-Arc processes.			
	Tank body	Q235 Carbon steel, Tank shell thickness 4mm Tank End (Ball shape) plate thickness 5mm,			
	Discharge valve	4 inch Butterfly discharge valve			
Tank Body	Safety valve	2 sets double safety valve			
	Manhole	2 sets standard manholes, 500 mm diameter, Henghe brand			
	Fuel Engine	Power station 4102 diesel engine			
	Air compressor	12m³/Min, 0.2Mpa double cylinder			
	Working pressure	0.2 Mpa Test pressure : 0.3 Mpa			
	King Pin	3.5"(90#) bolts type King pin			
	Landing Gear	28 Tons manual operation with two speed			
	Axle	3 Sets* 13T-B2 , square axle			
	Suspension	Heavy duty 3-axle suspension with equalizers, American desigr			
OEM parts	Leaf Spring	6 Sets 60# spring, 10 layers * 13mm thickness * 90mm width			
	Brake system	4 double+2 single brake chambers; Wide brake pads, 2*45 Liters air tank; Reliable Automatic Relay valve			
	ABS	4S/2M KORMMEE brand ABS			
	Rim	8.5-20 steel wheel rim, 12 Pcs + 1 spare			
	Tire	12.00R22.5 Tubeless tires, 12 Pcs + 1 spare			
	Ladder	Detachable ladder at rear part			
	Discharging Hose	4" pipe & hose with quick coupling 7 meters			
Accessories	Cat walk	Anti-skid walk way from rear to first manhole			
Accounted	Rear&Side Guard	Side guard+Rear guard+Mud guard			
	Spare Tire Carrier	1 set spare wheel carriers, including a riser.			
	Tools Box	1 Pc standard tool box with lock.			

SHENGRUN AUTO Since 1982. Double safety Tanker






Tongya road NO.1, Quanpu industrial area Liangshan County, Shandong Province, China Mobile: +86 15805376335 | Tel: +86-537-7608666 | jonah@shengrunauto.cn

Electrical	One unit of 24V 7-Pin ISO 1185 socket; LED light	
Electrical	(Standard rear light, side light, rear reflector, side light, side reflector etc.)	
	Sand blasting before painting; one coats of primer, anti-corrosion;	
Painting	two coats of finish painting; Polyurethane paint . Color optional.	
	Logo, stickers and reflector as customer's requirements.	

* Notes:

- 1. The above dimension and weight will be adjusted according to the tractor specifications and actual production design.
- 2. All the details not mentioned above should comply with Chinese regulations.
- 3. If any components or structure changed, the price shall be modified accordingly.

Drawings for Reference

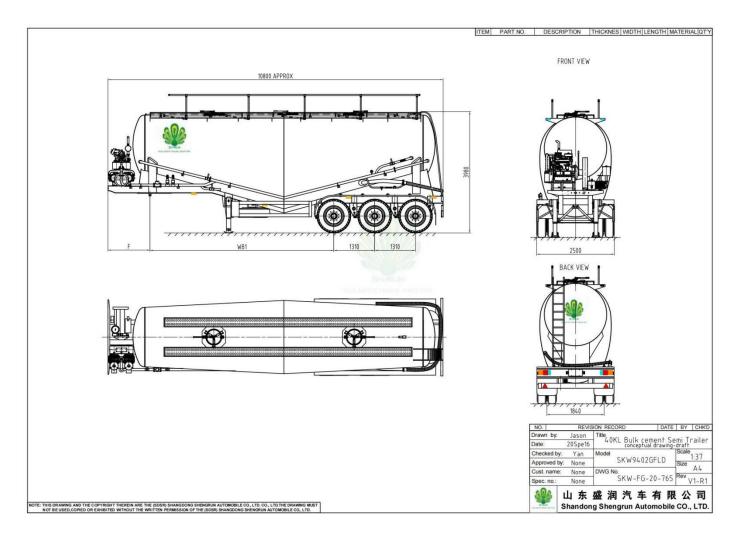





Tongya road NO.1, Quanpu industrial area Liangshan County, Shandong Province, China Mobile: +86 15805376335 | Tel: +86-537-7608666 | jonah@shengrunauto.cn

Pictures and Details





--- Page 4 / 8 ---



Shandong Shengrun Automobile Co., Ltd Tongya road NO.1, Quanpu industrial area Liangshan County, Shandong Province, China Mobile: +86 15805376335 | Tel: +86-537-7608666 | jonah@shengrunauto.cn

产品优势 Product advantages:

1. 高强度加固型车架,车身设计重心更低,行驶更稳定更更安全 High-strength reinforced frame, lower center of gravity design, more stable and safer driving..



2. 罐体结构优化,适用多种运输介质,出料口加装二次助吹结构, 卸货速度更快,卸货残余量将至最低 The tank structure is optimized, suitable various bulk cement cargoes, the discharge pipe is equipped with a secondary blowing-assisting pipe, which makes the unloading speed faster and the residual amount of unloading will be minimized.;



3. 高端罐体焊接工艺, 罐体内加装加强圈和横向支撑, 双安全泄压阀设计, 加装压力指示仪表, 罐体承压性和安全性更高 High-end tank body welding process, reinforcement ring and lateral support are installed inside the tank body, double safety relief valve design, installation of pressure indicator, the tank body has higher pressure bearing and more safety;






Shandong Shengrun Automobile Co., Ltd Tongya road NO.1, Quanpu industrial area Liangshan County, Shandong Province, China Mobile: +86 15805376335 | Tel: +86-537-7608666 | jonah@shengrunauto.cn

4. 加装柴油机动力机组,双缸空压机,提供充足卸货驱动气源,罐体前后双进气管道,卸货更顺畅 Diesel engine power units and double-cylinder air compressors are installed to provide sufficient unloading driving air source, and dual intake pipes at the front and rear of the tank make unloading smoother;



5. 牵引板厚度为 12mm, 强度更高,有效防止差路况引起牵引板开裂,牵引销采用 JOST 品牌装配式; The thickness of the Kingpin plate is 12mm, and the strength is higher, which can effectively prevent the cracking of the traction plate caused by poor road conditions, and the Kingpin adopts the JOST brand assembly type;

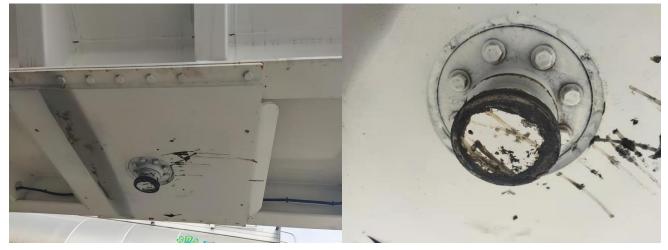


6. 支腿使用 JOST 品牌, 继动阀使用 WABCO 品牌, 均为国际知名品牌; JOST brand landing gear, and the relay valve uses the WABCO brand, both are internationally famous brands;





Tongya road NO.1, Quanpu industrial area Liangshan County, Shandong Province, China Mobile: +86 15805376335 | Tel: +86-537-7608666 | jonah@shengrunauto.cn





7. 内压紧式罐盖,密封性更好,易于开启和关闭 Internal compression type manhole, for better sealing and easy opening and closing;



8. 油漆采用喷粉工艺,漆膜厚,亮度高,使用寿命长,可有效防止海运过程中的海水腐蚀; The paint adopts powder spraying process, with thick paint film, good out looking and long service life, which can effectively prevent seawater corrosion during shipping;





Shandong Shengrun Automobile Co., Ltd Tongya road NO.1, Quanpu industrial area Liangshan County, Shandong Province, China Mobile: +86 15805376335 | Tel: +86-537-7608666 | jonah@shengrunauto.cn

9. 爬梯,工具箱,阀门箱,侧防护,挡泥板均为铝合金材质;装配式结构,方便维修保养; The ladder, tool box, valve box, side guard, and mud fenders are all made of aluminum alloy; the assembled structure is convenient for maintenance;





