



# Shandong Shengrun Automobile Co., Ltd

Tongya road NO.1, Quanpu industrial area Liangshan County, Shandong Province, China  
Mobile: +86 15805376335 | Tel: +86-537-7608666 | [jonah@shengrunauto.cn](mailto:jonah@shengrunauto.cn)

## QUOTATION SHEET



Quotation NO.: SR220311JL05

Date: 2022.03.11

Item	Description of Vehicles	Quantity	Price Term	Unit Price	Total Amount
1.	46,000 Liters 4 Compartments Aluminum Alloy Fuel Tanker Semitrailer- Pneumatic suspension	5 Units	CIF Tema	US\$ 48,800	US\$ 244,000

Present currency: 1 USD = 6.4 RMB Quotation valid date: 7 days

### Terms & Conditions:

<b>Delivery time</b>	Producing time 35 days after deposit payment received. 38 days ready to ship at China port.
<b>Package &amp; Shipment</b>	1 Unit per package by Tractor truck, Shipment by Bulk Ship or Ro-ro Ship
<b>Warranty &amp; After-sale service</b>	12 Months warranty for main beam. We'll provide qualified spare parts with the price we get from our suppliers, and sent engineer for maintenance if necessary.
<b>Payment terms</b>	30% Deposit by T/T within 3 days after order confirmed. 70% Balance payment by T/T before delivery from factory.



SHENGRUN AUTO  
Since 1982. Double safety Tanker





# Shandong Shengrun Automobile Co., Ltd

Tongya road NO.1, Quanpu industrial area Liangshan County, Shandong Province, China  
 Mobile: +86 15805376335 | Tel: +86-537-7608666 | [jonah@shengrunauto.cn](mailto:jonah@shengrunauto.cn)

## Specifications:

<b>Type</b>		<b>46,000 Liters</b> Fuel tank semi trailer - Gooseneck type 11500 Liters * 4 compartments
<b>Usage</b>		Hauling fuel oil( Gasoline, Diesel oil, Lube oil, etc.)
<b>Weight</b>	<b>Tare Weight</b>	Approx. 7.5 Tons
	<b>Loading capacity</b>	Effective volume 46,000 Liters, +3% vapor space
<b>Dimensions</b>	<b>Outside Dimension</b>	12000*2500*3950 mm (Final dimension depend on the producing design drawings)
<b>Tank Body</b>	<b>Design/welding Technology</b>	Heavy duty and extra durability designed; "T" main beam welding by automatic Submerged-Arc processes.
	<b>Tank body</b>	Material Aluminum alloy 5454, Tank End plate thickness 7mm, Tank shell thickness 6mm, Anti-wave plate thickness 5mm
	<b>Discharge valve</b>	3 inch Aluminum alloy Euro standard coupling, 4 Pcs
	<b>Emergency valve</b>	4 inch Aluminum alloy Pneumatic Emergency shut-off , 4 Pcs
	<b>Breathing valve</b>	Stabilizing breathing valve, 4 Pcs Aluminum alloy
	<b>Manhole</b>	Euro Standard, Aluminum alloy, 4 Pcs, Diameter: 500mm
	<b>Cat walk</b>	Unti-slip with Foldable handrail
	<b>Test</b>	Hydrostatic test to 5 psi(35Kpa) on each compartment
<b>OEM parts</b>	<b>King Pin</b>	3.5''(90#) bolts type king pin
	<b>Landing Gear</b>	28 Tons manual operation with two speed
	<b>Axle</b>	3 Sets* 13T-B2 , square axle
	<b>Suspension</b>	3 Axles heavy duty mechanical suspension
	<b>Brake system</b>	6 double brake chambers; Wide brake pads, 45 Liters air tank; Reliable Automatic transformer
	<b>Rim</b>	11.75R22.5 steel wheel rim 6 Pcs + 1 spare
	<b>Tire</b>	385/65R22.5 Single tire, 6 Pcs + 1 spare
<b>Accessories</b>	<b>Fire extinguisher</b>	2 Pcs *8 kgs fire extinguisher with box
	<b>Ladder</b>	Aluminum alloy Detachable ladder
	<b>Discharging Hose</b>	3 inch Rubber hose 2Pcs, 6 meters /each
	<b>Hose container</b>	2 Pcs Aluminum Alloy Cylinder Rubber hose container
	<b>Rear&amp;Side Guard</b>	Side guard+Rear guard+Mud guard+ Anti Static device
	<b>Spare Tire Carrier</b>	1 set spare wheel carriers, including a riser.
	<b>Valve Box</b>	1 Pc Aluminum Alloy Valve box with lock.
	<b>Tools Box</b>	1 Pc Aluminum Alloy tool box with lock.
	<b>Anti-static device</b>	Standard Anti-static device and electric circuit





# Shandong Shengrun Automobile Co., Ltd

Tongya road NO.1, Quanpu industrial area Liangshan County, Shandong Province, China  
 Mobile: +86 15805376335 | Tel: +86-537-7608666 | [jonah@shengrunauto.cn](mailto:jonah@shengrunauto.cn)

<b>Electrical</b>	One unit of 24V 7-Pin ISO 1185 socket; LED light ( Standard rear light, side light, rear reflector, side light, side reflector etc.)
<b>Painting</b>	Without painting, Logo and stickers according customer's requirements..

\* Notes:

1. The above dimension and weight will be adjusted according to the tractor specifications and actual production design.
2. All the details not mentioned above should comply with Chinese regulations.
3. If any components or structure changed, the price shall be modified accordingly.

## Drawings for Reference

	ITEM	PART NO.	DESCRIPTION	THICKNESS	WIDTH	LENGTH	MATERIAL	QTY																																										
<p><b>LEFT SIDE</b> 11871 APPROX</p> <p style="text-align: right;">APPROX. 3950</p>																																																		
<p><b>RIGHT SIDE</b> 11500 APPROX</p>																																																		
			<p><b>FRONT VIEW</b> 2500</p>																																															
			<p><b>REAR VIEW</b></p> <p style="text-align: center;">2050</p>																																															
<p>Fuel tanker:            1. Overall dimension: LxWxH:11871x2500x3950mm approx            2. Effective volume: 45cbm+(5%-10%)            3. Compartments: 6 compartments, from front to rear:            6500KL/9500KL/7250KL/7250KL/7250KL/7250KL</p>																																																		
<table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th colspan="3">REVISION RECORD</th> <th>DATE</th> <th>BY</th> <th>CHKD</th> </tr> </thead> <tbody> <tr> <td>Drawn by:</td> <td>Jason</td> <td>Title</td> <td>Fuel Tanker Semi Trailer</td> <td></td> <td></td> </tr> <tr> <td>Date:</td> <td>21Mar05</td> <td></td> <td>conceptual drawing-draft</td> <td></td> <td></td> </tr> <tr> <td>Checked by:</td> <td>Yan</td> <td>Model</td> <td>SKW9400GYY</td> <td>Scale</td> <td>1:37</td> </tr> <tr> <td>Approved by:</td> <td>None</td> <td></td> <td></td> <td>Size</td> <td>A4</td> </tr> <tr> <td>Cust. name:</td> <td>None</td> <td>DWG No.</td> <td>SKW-YG-21-0466</td> <td>Rev</td> <td>V1-R1</td> </tr> <tr> <td>Spec. no.:</td> <td>None</td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>									REVISION RECORD			DATE	BY	CHKD	Drawn by:	Jason	Title	Fuel Tanker Semi Trailer			Date:	21Mar05		conceptual drawing-draft			Checked by:	Yan	Model	SKW9400GYY	Scale	1:37	Approved by:	None			Size	A4	Cust. name:	None	DWG No.	SKW-YG-21-0466	Rev	V1-R1	Spec. no.:	None				
REVISION RECORD			DATE	BY	CHKD																																													
Drawn by:	Jason	Title	Fuel Tanker Semi Trailer																																															
Date:	21Mar05		conceptual drawing-draft																																															
Checked by:	Yan	Model	SKW9400GYY	Scale	1:37																																													
Approved by:	None			Size	A4																																													
Cust. name:	None	DWG No.	SKW-YG-21-0466	Rev	V1-R1																																													
Spec. no.:	None																																																	
<p style="font-size: small;">NOTE: THIS DRAWING AND THE COPYRIGHT THEREIN ARE THE (SOSR) SHANGDONG SHENGRUN AUTOMOBILE CO., LTD. CO., LTD. THE DRAWING MUST NOT BE USED, COPIED OR EXHIBITED WITHOUT THE WRITTEN PERMISSION OF THE (SOSR) SHANGDONG SHENGRUN AUTOMOBILE CO., LTD.</p>																																																		





# Shandong Shengrun Automobile Co., Ltd

Tongya road NO.1, Quanpu industrial area Liangshan County, Shandong Province, China  
Mobile: +86 15805376335 | Tel: +86-537-7608666 | [jonah@shengrunauto.cn](mailto:jonah@shengrunauto.cn)

## Pictures and Details



SHENGRUN AUTO  
Since 1982. Double safety Tanker







# Shandong Shengrun Automobile Co., Ltd

Tongya road NO.1, Quanpu industrial area Liangshan County, Shandong Province, China  
Mobile: +86 15805376335 | Tel: +86-537-7608666 | [jonah@shengrunauto.cn](mailto:jonah@shengrunauto.cn)

## Products Advantages- Aluminum alloy Tankers

### 1- 防断裂 Anti-fracture

自主国家专利技术 T 型铝合金纵梁（专利号：ZL201520863650.9），采用 1 万-1.2 万吨级（同行是 3000-5000 吨）挤压机一次性挤压成型，承载力和抗扭能力极强，是传统 L 型纵梁的 3-5 倍，防止在极端情况下出现大梁断裂。 National patented T-shaped beam, bearing capacity and torsion resistance are 3-5 times that of traditional L-shaped longitudinal beam.

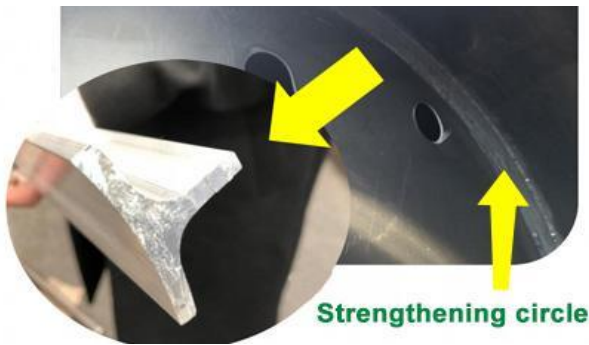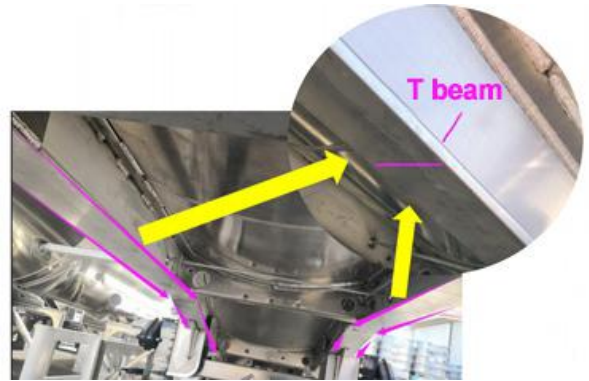



### 2- 防撞损 Anti-damage

采用符合 ASME 质量标准的铝合金罐体，强度高，塑性强，能够吸收应力，抗冲击；采用自主专利设计三道棱型加强圈，增加防波板抗冲击能力，防止应力集中导致罐体撕裂。 ASME standard aluminum alloy tank body, three prismatic reinforcement ring, stress absorption and impact resistance.

### 3- 防泄漏 Anti-leakage

机器人焊接+专利工装夹具，采用全自动单面焊双面成型 TIG 焊、MIG 焊，并进行 X 射线探伤，全方位无死角检测，保证焊接强度和焊缝质量 100%合格，防止泄露。

Robot welding+patented Tooling fixture, the quality and strength of the weld are higher than that of the cylinder plate.

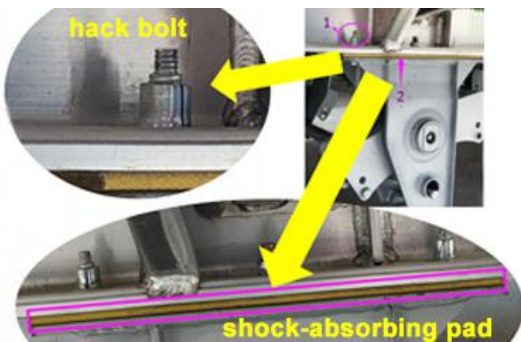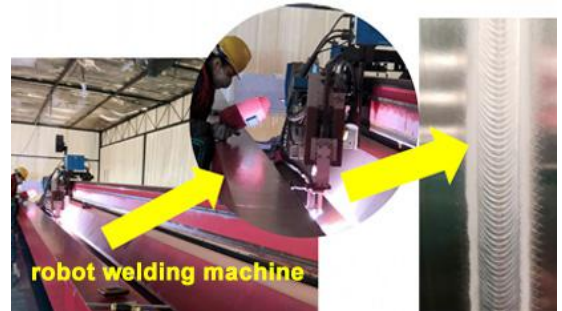

### 4 防震动-定制装配式抗震悬架 Anti-vibration

(1) 悬架用哈克钉螺栓，压紧式装配，减少焊接带来的应力变形，提高整车底座使用寿命；(2) 悬架和大梁之间装配减震垫板，减少大梁与悬架的摩擦，缓冲不平整地形带来的扭曲力，整车减震效果更好，提高车辆行驶的平稳性和安全性。 Customized reduced-fit anti-seismic suspension, permanent hack bolt + shock-absorbing pad, the vehicle travels more stably.

### 5 防侧翻-低重心设计 Anti-rollover

车身底盘重心低，比同行厂家低 5-10cm，罐体轻，安全防侧翻能力更强。据专家分析，罐车重心每低 5cm，侧翻事故减少 30%-50%。 The center of gravity of the body and chassis is 5-10cm lower than that of peer manufacturers, the tank is lighter, and the safety and anti-rollover ability is stronger.



SHENGRUN AUTO  
Since 1982. Double safety Tanker

