



Shandong Shengrun Automobile Co., Ltd

Tongya road NO.1, Quanpu industrial area Liangshan County, Shandong Province, China
Mobile: +86 15805376335 | Tel: +86-537-7608666 | jonah@shengrunauto.cn

QUOTATION SHEET



Quotation NO.: SR220409JL08

Date: 2022.04.09

Item	Description of Vehicles	Quantity	Price Term	Unit Price / FOB	Unit Price / CIF Djibouti
1.	20 Ft Carbon Steel Tank Container	20 Units		US\$ 14,000	US\$ 18,100
2.	40 Ft Carbon Steel Tank Container	20 Units		US\$ 17,600	US\$ 25,900

Currency: 1 USD = 6.3 RMB Quotation valid date: 15 days

Terms & Conditions:

Lead time	Producing time 35 days after deposit payment received. 37 days deliver at China port.
Package & Shipment	1/2 Units per package by Tractor truck, Shipment by Bulk Ship or Ro-ro Ship
Warranty & After-sale service	12 Months warranty for main frame. We'll provide qualified spare parts with the price we get from our suppliers, and sent engineer for maintenance if necessary.
Payment terms	30% Deposit by T/T within 3 days after order confirmed. 70% Balance payment by T/T before delivery from factory.





Shandong Shengrun Automobile Co., Ltd

Tongya road NO.1, Quanpu industrial area Liangshan County, Shandong Province, China
Mobile: +86 15805376335 | Tel: +86-537-7608666 | jonah@shengrunauto.cn

Specifications:

Type		ISO standard Stainless steel tank container	
Usage		Hauling Fuel / Petroleum / general liquid	
Certification		ISO standard for multi-modal transport (Sea, Rail & Road)	
Model		20 FT	40 FT
Weight	Tare Weight	Approx. 3700 Kg	Approx. 7000 Kg
	Loading capacity	Effective volume 23,000 Liters, +5% vapor space	Effective volume 42,000 Liters, +5% vapor space
Dimensions	Outside Dimension	6058*2438*2591 mm	12192*2438*2591mm
Tank Body	Tank Shell	Q345R Carbon Steel, Tank shell thickness 5mm, DN 2300*5950mm	Q345R Carbon Steel, Tank shell thickness 5/6mm, DN 2200*11450mm
	Discharge valve	3 inch Butterfly bumper valve at the rear side of tank, with 3 inch quick coupler	
	Top Loading Valve	Stainless steel 3 inch valve, with 3 inch quick coupler	
	Safety valve	1 set, Emergency shut down stainless steel valve	
	Breathing valve	2 inch breathing valve	
	Manhole/ Hatch	Standard stainless steel DN 500mm	
	Working pressure	0.09 Mpa Test pressure : 0.3 Mpa	
	Design Temperature	-40-65 °C	
Frame	Material of frame	Q345D High strength Carbon Steel	
	Tank Frame corner casting material	Casting steel parts material ZG35, Other technical requirement according to ISO 1161:1984	
	Stacking Height	Up to 6 Loaded containers	
	Ladder	Ladder at rear part	
	Cat walk	Anti-skid walk way from rear to first manhole	
Painting	Sand blasting before painting; one coats of primer, anti-corrosion; two coats of finish painting; Polyurethane paint . Color optional.		

* Notes:

1. The above dimension and weight will be adjusted according to the tractor specifications and actual production design.
2. All the details not mentioned above should comply with Chinese regulations.
3. If any components or structure changed, the price shall be modified accordingly.






Shandong Shengrun Automobile Co., Ltd

Tongya road NO.1, Quanpu industrial area Liangshan County, Shandong Province, China
Mobile: +86 15805376335 | Tel: +86-537-7608666 | jonah@shengrunauto.cn

Drawing and Pictures for Reference

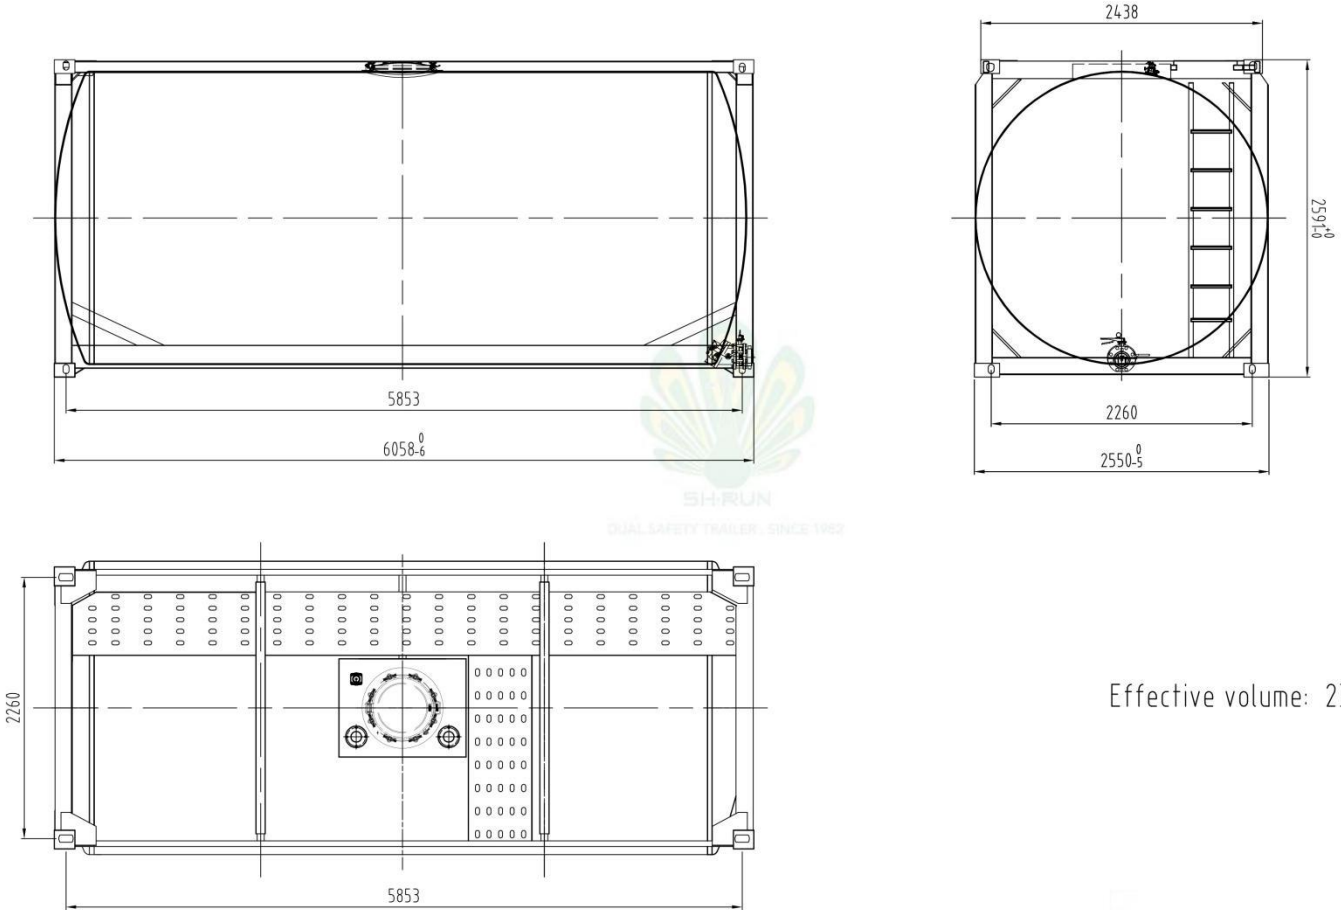

Effective volume: 23 cbm

20 FT ISO Tank Container



SHENGRUN AUTO
Since 1982. Double safety Tanker



Shandong Shengrun Automobile Co., Ltd

Tongya road NO.1, Quanpu industrial area Liangshan County, Shandong Province, China
Mobile: +86 15805376335 | Tel: +86-537-7608666 | jonah@shengrunauto.cn

30 FT Tank Container



40 FT ISO Tank Container



SHENGRUN AUTO
Since 1982. Double safety Tanker

- Anti-fracture
- Anti-damage
- Anti-leakage
- Anti-vibration
- Anti-rollover